


CABLE TIES



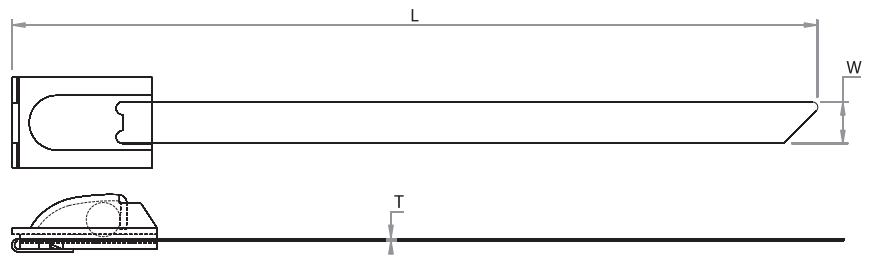

STAINLESS STEEL BALL LOCK CABLE TIE

Aftec Stainless Steel Ball Lock cable ties are self locking for fast & easy installation. 316 grade Stainless steel which provides excellent resistance to extreme conditions, corrosion, weather and UV radiation.

Technical Data

Application : For Indoor-Outdoor applications. Installation of cables, wire & pipes in extreme conditions and hazardous area.



Material : SS 316 L non-magnetic stainless steel.

Operating temperature : - 80°C to + 538°C.

Flammability rating : Fire proof, UV-resistant.

MODEL NO.	WIDTH		LENGTH		TENSILE STRENGTH		MAXIMUM BUNDLE DIA		THICKNESS
	W		L		KGS	LBS	INCH	MM	T
	MM	INCH	MM						MM
ACTI 4.6-100 BL	4.6		4	100	60	132	0.86	22	0.25
ACTI 4.6-150 BL*			6	150			1.18	30	
ACTI 4.6-200 BL*			8	200			1.97	50	
ACTI 4.6-260 BL*			10.4	260			2.76	70	
ACTI 4.6-300 BL*			12	300			3.35	85	
ACTI 4.6-360 BL*			14.4	360			3.94	100	
ACTI 4.6-450 BL*			18	450			5.12	130	
ACTI 4.6-520 BL*			20.8	520			5.91	150	
ACTI 4.6-610 BL*			24.4	610			7.09	180	
ACTI 4.6-680 BL*			27.2	680			7.87	200	
ACTI 4.6-840 BL*			33.6	840			9.84	250	
ACTI 4.6-1000 BL*			40	1000			11.81	300	
ACTI 7.9-150 BL*	7.9		6	150	170	375	0.98	25	0.25
ACTI 7.9-200 BL*			8	200			1.97	50	
ACTI 7.9-260 BL*			10.4	260			2.76	70	
ACTI 7.9-300 BL*			12	300			3.35	85	
ACTI 7.9-360 BL*			14.4	360			3.94	100	
ACTI 7.9-450 BL*			18	450			5.12	130	
ACTI 7.9-520 BL*			20.8	520			5.91	150	
ACTI 7.9-610 BL*			24.4	610			7.09	180	
ACTI 7.9-680 BL*			27.2	680			7.87	200	
ACTI 7.9-840 BL*			33.6	840			9.84	250	

* UL LISTED

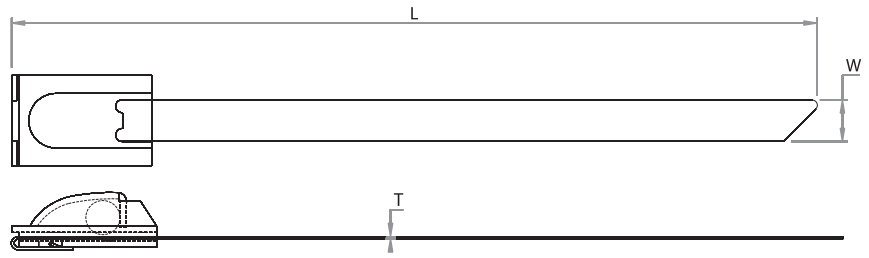

STAINLESS STEEL BALL LOCK CABLE TIES POLYESTER COATED

Aftec Stainless Steel Ball Lock Polyester Coated cable ties are self locking for fast & easy installation. Polyester coating ties are halogen free & nontoxic which provides improved installation between dissimilar materials which are excellent resistance to mist, chemicals and salt sprays.

Technical Data

Application : For Indoor-Outdoor application. Installation of cables, wire & pipes in extreme conditions and hazardous area.

Material : SS 316 L non-magnetic stainless steel.


Operating temperature : - 80°C to + 150°C.

Flammability rating : Halogen free, Low smoke, nontoxic, UV resistance.

Coating : UL 94V-0, polyester coated.

MODEL NO.	WIDTH		LENGTH		TENSILE STRENGTH		MAXIMUM BUNDLE DIA		THICKNESS
	W	L							T
	MM	INCH	MM	KGS	LBS	INCH	MM	MM	
ACTI 4.6-100 BLP	4.6	4	100	60	132	0.86	22	0.38	
ACTI 4.6-150 BLP*		6	150			1.18	30		
ACTI 4.6-200 BLP*		8	200			1.97	50		
ACTI 4.6-260 BLP*		10.4	260			2.76	70		
ACTI 4.6-300 BLP*		12	300			3.35	85		
ACTI 4.6-360 BLP*		14.4	360			3.94	100		
ACTI 4.6-450 BLP*		18	450			5.12	130		
ACTI 4.6-520 BLP*		20.8	520			5.91	150		
ACTI 4.6-610 BLP*		24.4	610			7.09	180		
ACTI 4.6-680 BLP*		27.2	680			7.87	200		
ACTI 4.6-840 BLP*		33.6	840			9.84	250		
ACTI 4.6-1000 BLP*		40	1000			11.81	300		
ACTI 7.9-150 BLP*	7.9	6	150	170	375	0.98	25	0.38	
ACTI 7.9-200 BLP*		8	200			1.97	50		
ACTI 7.9-260 BLP*		10.4	260			2.76	70		
ACTI 7.9-300 BLP*		12	300			3.35	85		
ACTI 7.9-360 BLP*		14.4	360			3.94	100		
ACTI 7.9-450 BLP*		18	450			5.12	130		
ACTI 7.9-520 BLP*		20.8	520			5.91	150		
ACTI 7.9-610 BLP*		24.4	610			7.09	180		
ACTI 7.9-680 BLP*		27.2	680			7.87	200		
ACTI 7.9-840 BLP*		33.6	840			9.84	250		

* UL LISTED

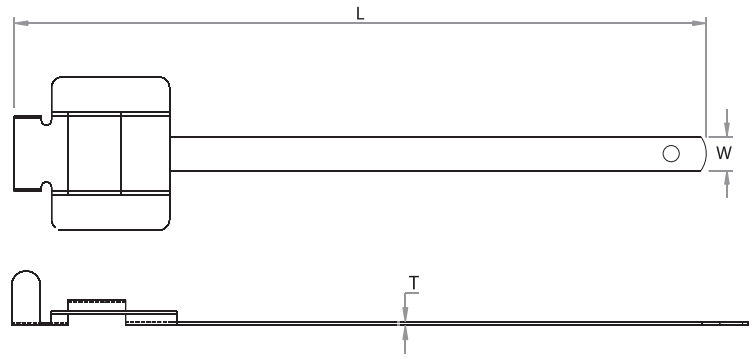

RELEASABLE STAINLESS STEEL CABLE TIES

Aftec Releasable Stainless Steel cable ties are designed for quick fastening and also be unfastened for reuse, which accommodate double wrapping. (SS 316) Stainless steel which provides excellent resistant to extreme conditions, corrosion, whether and UV radiation.

Technical Data

Application : For Indoor -Outdoor application. Installation of cables, wire & pipes in extreme conditions and hazardous area.


Material : SS 316 L nonmagnetic stainless steel.

Operating temperature : - 80°C to + 538°C.

Flammability rating : Fire proof, UV – resistant.

MODEL NO.	WIDTH		LENGTH		TENSILE STRENGTH		MAXIMUM BUNDLE DIA		THICKNESS
	W		L		KGS	LBS	INCH	MM	T
	MM	INCH	MM	MM					
ACTI 6.3-152 RS*	6.3		6.08	152	149	330	1.30	33	0.50
ACTI 6.3-229 RS*			9.16	229			2.28	58	
ACTI 6.3-305 RS*			12.2	305			3.19	81	
ACTI 6.3-457 RS*			18.28	457			5.20	132	
ACTI 6.3-500 RS*			20	500			5.91	150	
ACTI 6.3-610 RS*			24.4	610			7.09	180	
ACTI 9.5-152 RS*	9.5		6.08	152	181	400	1.30	33	0.50
ACTI 9.5-229 RS*			9.16	229			2.28	58	
ACTI 9.5-305 RS*			12.2	305			3.19	81	
ACTI 9.5-457 RS*			18.28	457			5.20	132	
ACTI 9.5-500 RS*			20	500			5.91	150	
ACTI 9.5-610 RS*			24.4	610			7.09	180	
ACTI 9.5-762 RS*			30.48	762			8.90	226	
ACTI 9.5-914 RS*			36.56	914			10.83	275	

* UL LISTED

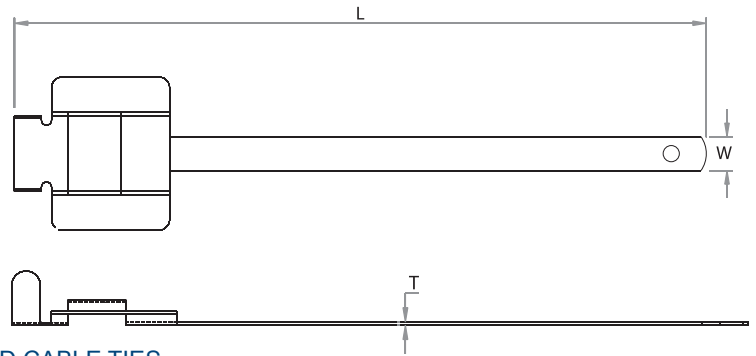

RELEASABLE STAINLESS STEEL POLYESTER COATED CABLE TIES

Aftec Releasable Stainless Steel Polyester coated cable ties are designed for quick fastening and unfastening for reuse. It is also designed to accommodate double wraps. Polyester coating are halogen free, nontoxic low smoke for better protection of cables and for installer safety.

Technical Data

Application : For Indoor -Outdoor application, installation of cables, wire & pipes in extreme conditions and hazardous area.

Material : SS 316 L nonmagnetic stainless steel.


Operating temperature : - 80°C to + 150°C.

Flammability rating : Halogen free, low smoke, nontoxic, UV resistance.

Coating : UV 94V-0, Polyester coated

MODEL NO.	WIDTH		LENGTH		TENSILE STRENGTH		MAXIMUM BUNDLE DIA		THICKNESS
	W		L						T
	MM	INCH	MM		KGS	LBS	INCH	MM	MM
ACTI 6.3-152 RSP*	6.3	6.08	152	149	330	1.30	33	1.10	
ACTI 6.3-229 RSP*		9.16	229			2.28	58		
ACTI 6.3-305 RSP*		12.2	305			3.19	81		
ACTI 6.3-457 RSP*		18.28	457			5.20	132		
ACTI 6.3-500 RSP*		20	500			5.91	150		
ACTI 6.3-610 RSP*		24.4	610			7.09	180		
ACTI 9.5-152 RSP*	9.5	6.08	152	181	400	1.30	33	1.10	
ACTI 9.5-229 RSP*		9.16	229			2.28	58		
ACTI 9.5-305 RSP*		12.2	305			3.19	81		
ACTI 9.5-457 RSP*		18.28	457			5.20	132		
ACTI 9.5-500 RSP*		20	500			5.91	150		
ACTI 9.5-610 RSP*		24.4	610			7.09	180		
ACTI 9.5-762 RSP*		30.48	762			8.90	226		
ACTI 9.5-914 RSP*		36.56	914			10.83	275		

* UL LISTED

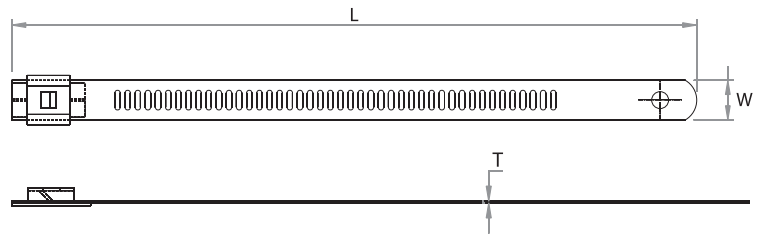

EASY LOCK STAINLESS STEEL CABLE TIES

Aftec Easy Lock Stainless Steel cable ties are self locking with multiple locking systems which are designed for fast, stronger and secure installation with no sharp edges. 316 grade Stainless steel which provides excellent resistant to extreme conditions, corrosion, whether and UV radiation, which also has slots till end for large bundle diameter with the same tie length.

Technical Data

Application : For Indoor-Outdoor application. Installation of cables, wire & pipes in extreme conditions and hazardous area.



Material : SS 316 L nonmagnetic stainless steel.

Operating temperature : - 80°C to + 538°C.

Flammability rating : Fire proof, UV – resistant.

MODEL NO.	WIDTH		LENGTH		TENSILE STRENGTH		MAXIMUM BUNDLE DIA		THICKNESS
	W		L						T
	MM	INCH	MM	INCH	KGS	LBS	INCH	MM	MM
ACTI 7-150 EL*	7	6	150	45	100	1.57	40	0.25	
ACTI 7-200 EL*		8	200			2.17	55		
ACTI 7-225 EL*		9	225			2.56	65		
ACTI 7-250 EL*		10	250			2.95	75		
ACTI 7-300 EL*		12	300			3.54	90		
ACTI 7-360 EL*		14.4	360			3.94	100		
ACTI 7-450 EL*		18	450			4.33	110		
ACTI 7-600 EL*		24	600			5.31	135		
ACTI 7-610 EL*		24.4	610			5.71	145		
ACTI 7-750 EL*		30	750			7.68	195		
ACTI 7-1000 EL*		40	1000			11.61	295		
ACTI 12-150 EL*	12	6	150	111	250	1.57	40	0.25	
ACTI 12-200 EL*		8	200			2.17	55		
ACTI 12-225 EL*		9	225			2.56	65		
ACTI 12-250 EL*		10	250			2.95	75		
ACTI 12-300 EL*		12	300			3.54	90		
ACTI 12-360 EL*		14.4	360			3.94	100		
ACTI 12-450 EL*		18	450			4.33	110		
ACTI 12-600 EL*		24	600			5.31	135		
ACTI 12-610 EL*		24.4	610			5.71	145		
ACTI 12-750 EL*		30	750			7.68	195		
ACTI 12-1000 EL*		40	1000			11.61	295		

* UL LISTED

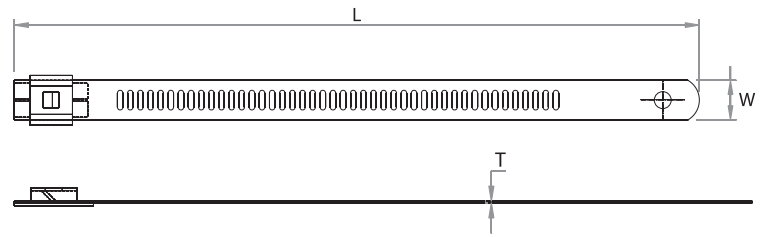

EASY LOCK STAINLESS STEEL CABLE TIES POLYESTER COATED

Aftec Easy Lock Stainless Steel Polyester coated cable ties are self locking with multiple locking system which are designed for fast stronger and secure installation with no sharp edges which also has slots till end for large bundle diameter with the same tie length. Polyester coating are halogen free, nontoxic low smoke for better protection of cables and for human safety.

Technical Data

Application : For Indoor-Outdoor application. Installation of cables, wire & pipes in extreme conditions and hazardous area.

Material : SS 316 L nonmagnetic stainless steel.


Operating temperature : - 80°C to + 150°C.

Flammability rating : Halogen free, low smoke, nontoxic, UV resistance.

Coating : UV 94V-0, Polyester coated.

MODEL NO.	WIDTH		LENGTH		TENSILE STRENGTH		MAXIMUM BUNDLE DIA		THICKNESS
	W	L	T						
	MM	INCH	MM	KGS	LBS	INCH	MM	MM	
ACTI 7-150 ELP*	7	6	150	45	100	1.57	40	0.40	
ACTI 7-200 ELP*		8	200			2.17	55		
ACTI 7-225 ELP*		9	225			2.56	65		
ACTI 7-250 ELP*		10	250			2.95	75		
ACTI 7-300 ELP*		12	300			3.54	90		
ACTI 7-360 ELP*		14.4	360			3.94	100		
ACTI 7-450 ELP*		18	450			4.33	110		
ACTI 7-600 ELP*		24	600			5.31	135		
ACTI 7-610 ELP*		24.4	610			5.71	145		
ACTI 7-750 ELP*		30	750			7.68	195		
ACTI 7-1000 ELP*		40	1000			11.61	295		
ACTI 12-150 ELP*	12	6	150	111	250	1.57	40	0.40	
ACTI 12-200 ELP*		8	200			2.17	55		
ACTI 12-225 ELP*		9	225			2.56	65		
ACTI 12-250 ELP*		10	250			2.95	75		
ACTI 12-300 ELP*		12	300			3.54	90		
ACTI 12-360 ELP*		14.4	360			3.94	100		
ACTI 12-450 ELP*		18	450			4.33	110		
ACTI 12-600 ELP*		24	600			5.31	135		
ACTI 12-610 ELP*		24.4	610			5.71	145		
ACTI 12-750 ELP*		30	750			7.68	195		
ACTI 12-1000 ELP*		40	1000			11.61	295		

* UL LISTED

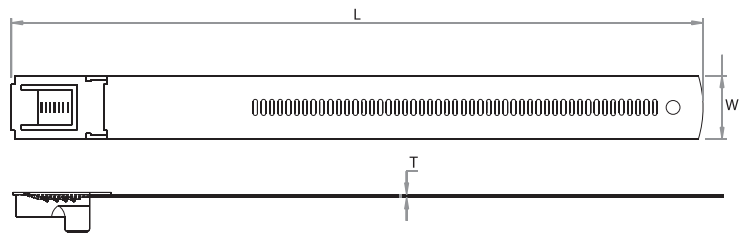

MULTI LOCK STAINLESS STEEL CABLE TIES

Aftec Multi Lock Stainless Steel cable ties are self locking with multiple locking systems for stronger and secured hold. Designed to accommodate double wrapping with no sharp edges. It also has slots till end for large bundle diameters with the same length. 316 grade Stainless steel provides excellent resistance to extreme conditions, corrosion, whether and UV radiation.

Technical Data

Application : For indoor and outdoor application. Installation of cables, wire & pipes in extreme conditions and hazardous area.


Material : SS 316 L nonmagnetic stainless steel.

Operating temperature : - 80°C to + 538°C.

Flammability rating : Fire proof, UV – resistant.

MODEL NO.	WIDTH	LENGTH		TENSILE STRENGTH		MAXIMUM BUNDLE DIA		THICKNESS
	W	L				INCH	MM	T
	MM	INCH	MM	KGS	LBS			MM
ACTI 7-150 ML*	7.0	6	150	60	132	1.65	42	0.25
ACTI 7-225 ML*		9	225			2.56	65	
ACTI 7-300 ML*		12	300			3.54	90	
ACTI 7-450 ML*		18	450			5.31	135	
ACTI 7-610 ML*		24.4	610			7.20	183	
ACTI 12-150 ML*	12.0	6	150	130	286	1.65	42	0.25
ACTI 12-225 ML*		9	225			2.56	65	
ACTI 12-300 ML*		12	300			3.54	90	
ACTI 12-450 ML*		18	450			5.31	135	
ACTI 12-610 ML*		24.4	610			7.20	183	

* UL LISTED

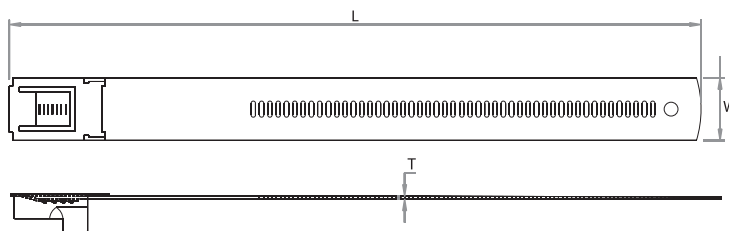

MULTI LOCK STAINLESS STEEL CABLE TIES POLYESTER COATED


Aftec Multi Lock Stainless Steel Polyester coated cable ties are self locking with multiple locking system for stronger and secure hold. Designed to accommodate double wrapping with no sharp edges. It also has slots till end for large bundle diameters with the same length. Polyester coating are halogen free, nontoxic low smoke for better protection of cables and for human safety, and easy installation between dissimilar materials.

Technical Data

Application : For indoor and outdoor application. Installation of cables, wire & pipes in extreme conditions and hazardous area.
 Material : SS 316 non L magnetic stainless steel.
 Operating temperature : - 80°C to + 150°C.
 Flammability rating : Halogen free, low smoke, nontoxic, UV resistance.
 Coating : UV 94V-0, Polyester coated.

MODEL NO.	WIDTH	LENGTH		TENSILE STRENGTH		MAXIMUM BUNDLE DIA		THICKNESS
	W	L				INCH	MM	T
	MM	INCH	MM	KGS	LBS			MM
ACTI 7-150 MLP*	7.0	6	150	60	132	1.65	42	0.38
ACTI 7-225 MLP*		9	225			2.56	65	
ACTI 7-300 MLP*		12	300			3.54	90	
ACTI 7-450 MLP*		18	450			5.31	135	
ACTI 7-610 MLP*		24.4	610			7.20	183	
ACTI 12-150 MLP*	12.0	6	150	130	286	1.65	42	0.38
ACTI 12-225 MLP*		9	225			2.56	65	
ACTI 12-300 MLP*		12	300			3.54	90	
ACTI 12-450 MLP*		18	450			5.31	135	
ACTI 12-610 MLP*		24.4	610			7.20	183	

* UL LISTED




EMBOSSABLE STAINLESS STEEL TAGS

Aftec Embossable Stainless Steel Tags offers permanent identification of cables, hoses, conduits and pipes.

Technical Data

Application : For harsh environments such as petrochemical, marine, construction, power etc.
 Material : SS 316 L nonmagnetic stainless steel.
 Operating temperature : - 80°C to + 538°C.

MODEL NO.	WIDTH	LENGTH		THICKNESS	STD. QTY/ BAG
	W	L		T	
	MM	INCH	MM	MM	
AMS - 51SS	19	2.04	51	0.25	100 Pcs.
AMS - 63SS	38	2.52	63	0.40	
AMS - 89SS	19	3.56	89	0.40	
AMS - 115SS	9.9	4.6	115	0.30	

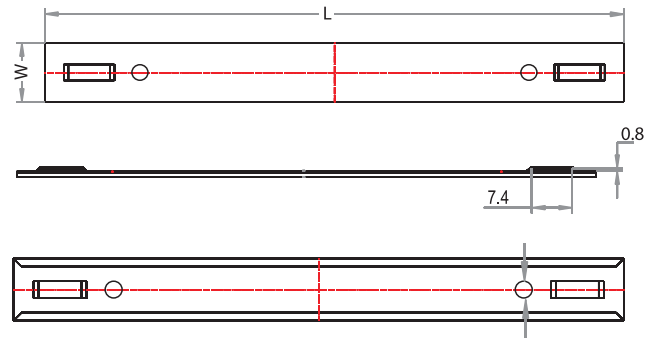

SLIDE ON STAINLESS STEEL CARRIER RAIL

Aftec Slide on pre marked marker strip is required to slide inside the carrier rails.

Technical Data

Application : For Multi lock, Easy lock & Ball lock stainless steel ties.
 Materia : SS 316 non magnetic stainless steel.
 Operating temperature : - 80°C to + 538°C.

MODEL NO.	WIDTH		LENGTH		MAX CAPACITY MARKERS PER RAILS	STD. QTY/ BAG
	W		L			
	MM	INCH	MM			
ACR - 46SS	11	1.84	46		6	100 Pcs.
ACR - 56SS	11	2.24	56		8	
ACR - 82SS	11	3.28	82		12	
ACR-106SS	11	4.24	106		16	
ACR-286SS	11	11.44	286		46	



SLIDE ON STAINLESS STEEL MARKER


Aftec Slide on Stainless steel markers are used with carrier rails. Marker strips are with 10mm height and are available in Alphabets, Numbers and Symbols.

Application : For safety and quick installation. Stainless steel marking system for extreme & hazardous environment.

Technical Data

Material : SS 316 L non magnetic stainless steel.
 Operating temperature : - 80°C to + 538°C.
 STD.QTY : 100pcs/Bag.

MODEL NO.	MODEL NO.	MODEL NO.	MODEL NO.	MODEL NO.	MODEL NO.
ASSM-A	ASSM-H	ASSM-O	ASSM-V	ASSM-2	ASSM-9
ASSM-B	ASSM-I	ASSM-P	ASSM-W	ASSM-3	ASSM- (-)
ASSM-C	ASSM-J	ASSM-Q	ASSM-X	ASSM-4	ASSM-(+)
ASSM-D	ASSM-K	ASSM-R	ASSM-Y	ASSM-5	ASSM- (/)
ASSM-E	ASSM-L	ASSM-S	ASSM-Z	ASSM-6	ASSM- ⊥ EARTH
ASSM-F	ASSM-M	ASSM-T	ASSM-0	ASSM-7	
ASSM-G	ASSM-N	ASSM-U	ASSM-1	ASSM-8	



STAINLESS STEEL BAND

Aftec Stainless Steel Bands have high strength fastening feature and the cable can be clamped quickly with the use of buckles & clips which provides site jobs fast, easy and less inventory.

Technical Data

Application : For Outdoor applications. Installation of cables, wire & pipes that requires various bundle diameters where the exact requirement lengths cannot be predetermined.


Material : SS 316 L non-magnetic stainless steel.

Operating temperature : - 80°C to + 538°C.

Flammability rating : Fire proof, UV-resistant

Packing : 25 meters roll

MODEL NO.	WIDTH	TENSILE STRENGTH		LENGTH	THICKNESS	USED WITH	
	W			L	T	JAW BUCKLE	CLIP
	MM	KGS	LBS	METERS	MM	PART NO	
ASSB 9.5U	9.5	340	750	30.5	0.63	ASSB-9U	ASSC-9U
ASSB 13U	12.7	543	1200	30.5	0.76	ASSB-13U	ASSC-13U
ASSB 16U	15.9	680	1500	30.5	0.76	ASSB-16U	ASSC-16U
ASSB 19U	19.0	815	1800	30.5	0.76	ASSB-19U	ASSC-19U



STAINLESS STEEL POLYESTER COATED BAND

Aftec Stainless Steel Polyester Coated Bands are high strength fastening feature and can be clamped quickly with the use of buckles & clips which provides site jobs fast, easy and less inventory. Polyester coating provides edge protection and prevents corrosion between dissimilar metals.

Application: For Outdoor applications. Installation of cables, wire & pipes that requires various bundle diameters where the exact requirement lengths cannot be predetermined.

Technical Data

Material : SS 316 L non-magnetic stainless steel.

Operating temperature : - 80°C to + 150°C.

Flammability rating : Halogen free, Low smoke, nontoxic, UV resistance.

Coating : UL 94V-0, polyester coated.

Packing : 25 meters roll

MODEL NO.	WIDTH	TENSILE STRENGTH		LENGTH	THICKNESS	USED WITH	
	W			L	T	JAW BUCKLE	CLIP
	MM	KGS	LBS	METERS	MM	PART NO	
ASSB 9.5C	9.5	228	505	25	1.22	ASSB-9U	ASSC-9U
ASSB 13C	12.7	303	670	25	1.22	ASSB-13U	ASSC-13U
ASSB 16C	15.9	380	840	25	1.22	ASSB-16U	ASSC-16U
ASSB 19C	19.0	453	1000	25	1.22	ASSB-19U	ASSC-19U



STAINLESS STEEL PERFORATED BETA STRIP

Aftec Stainless Steel Perforated Beta Strip can be easily applied with nut, bolt & no tools are required for installation.

Technical Data

Application : Applied where high vibration is the concern.
 Material : SS 316 L non-magnetic stainless steel.
 Operating temperature : - 80°C to + 538°C.
 Coating : Black PPA - thermoplastic.
 Packing : 25 meters.

MODEL NO.	WIDTH		HOLE DIA		LENGTH	THICKNESS
	W				L	T
	MM	INCH	MM		METERS	MM
APBS 13U	12.7	0.2	5		25	0.76
APBS 19U	19	0.28	7		25	0.76
APBS 26U	25.4	0.32	8		25	0.76



STAINLESS STEEL PERFORATED POLYESTER COATED BETA STRIP


Aftec Stainless Steel Polyester Coated Beta Strip can be easily applied with nut, bolt & no tools are required for installation.

Technical Data

Application : Applied where high vibration is the concern.
 Material : SS 316 L non-magnetic stainless steel.
 Operating temperature : - 80°C to + 150°C.
 Coating : UL 94V-0, polyester coated.

MODEL NO.	WIDTH		HOLE DIA		LENGTH	THICKNESS
	W				L	T
	MM	INCH	MM		METERS	MM
APBS 13C	12.7	0.2	5		25	1.3
APBS 19C	19	0.28	7		25	1.3
APBS 26C	25.4	0.32	8		25	1.3

Note:-For ordering hot dip galvanized, replace Catalogue No. with suffix HDG.

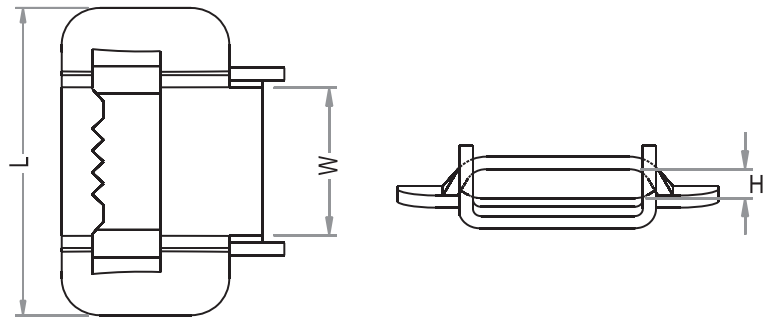


STAINLESS STEEL JAW BUCKLE

Aftec Stainless Steel Jaw Buckles are designed to accommodate both single and double wrapping of bundles. The jaws and wings are provided for maximum clamping strength.

Technical Data:

Material : SS 316 L non-magnetic stainless steel.

MODEL NO.	WIDTH	LENGTH	HEIGHT	STD. QTY/ BAG
	W	L	H	
	MM	MM	MM	
ASSB-9U	12.77	23.28	3.72	100 PCS
ASSB-13U	16.03	32.17	3.99	
ASSB-16U	19.07	34.5	3.98	
ASSB-19U	22.3	42.24	3.97	

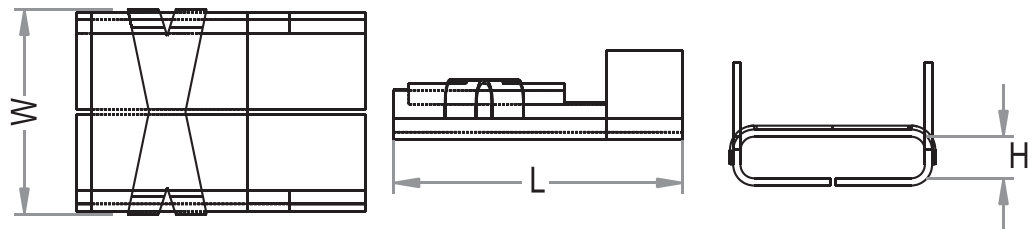

STAINLESS STEEL CLIP

Aftec Stainless Steel Clips are designed to use with all kinds of bands coated and uncoated.

Technical Data

Material : SS 316 L non-magnetic stainless steel.

MODEL NO.	WIDTH	LENGTH	HEIGHT	STD. QTY/ BAG
	W	L	H	
	MM	MM	MM	
ASSC-9U	12	16	4.05	100 PCS
ASSC-13U	15	23.3	3.9	
ASSC-16U	18	27.92	3.9	
ASSC-19U	22.0	29.28	3.9	